



Drevo

Vysoko kvalitné produkty

S'Match-It

S'MATCH-IT kolekcia

□ Výrobný proces

Drevo vyžaduje dlhší výrobný proces pretože...

...sezóna výrubu

...sušenie dreva (4-5 týždňov)

...finálne sušenie (na cca. 7%) v Tarkett-e (2-3 týž.)

...výroba (2 týždne)



S'MATCH-IT Range

□ Ponuka drevených športových povrchov 14mm alebo 22mm multilayer, 3 strips / 3 layers, z Hanaskogu(SW):

- Nášľapná vrstva 3.6mm
- Stredná vrstva v 90° uhle
- Štandardné letokruhy
- Spodná vrstva z dyhy
- Eliminuje prirodzené pohyby dreva
- Zlepšuje flexibilitu
- Nie je potreba dilatácie (okrem obvodu)
- Jednoduchá inštalácia




S'MATCH-IT – Povrchová úprava

□ Povrchová úprava

■ Proteco Lak

- UV-tvrdené
- Extrémne odolný
- Odolný voči poškrabaniu
- Neorganické rozpúšťadlá
- Trenie v súlade s EN 14904
- Aplikácia vo výrobe
- Jednoduchá údržba a čistenie



Friction (EN 14904) 80 to 110

S'MATCH-IT Ponuka

		Tarkett Sport Indoor
Trvalá inštalácia	Na rošte	REFLEX M Single joist system / Multilayer 22mm
		PROFLEX M Evolution Double joist system + Pad / Multilayer 22mm
	Continuous	MULTIFLEX M On Tarflex 9mm / Multilayer 14mm Ultraloc
Prenosná		SPORTABLE Multilayer 14mm Combifloor



S'MATCH-IT Range


REFLEX M

22mm multilayer beech or oak
Single joist system
12mm foam
53 % Shock absorption



PROFLEX M

22mm multilayer beech or oak
Double joist system + Pad
12mm foam
60 % Shock absorption

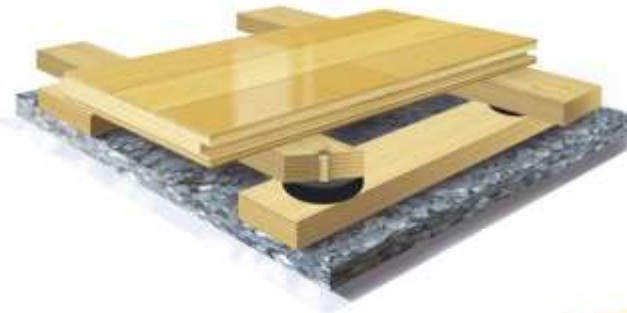

MULTIFLEX M

Multilayer 14mm
Continuous plywood 9mm / 45° direction
15mm foam
52 % Shock absorption



S'MATCH-IT Range - REFLEX M


Wooden floor – Product line entry.

Single joist system

53 % Shock absorption

Advantages : easy installation, price, ...

Disadvantages: Not completely homogeneous, ...




- 22mm Multilayer (Beech / Oak) – Width 188mm – Stapled on joist
- Birch 22mm plywood hemispherical joists - c/c 280mm
- TARFOAM 1200 - 12mm 100% recycled PU foam - 2m rolls– 51,75m²
- TARFILM – Polyethylene film anti-steam– 3m rolls– 159m²
- Accessories : Trap doors, ventilated skirtings compulsory, ...

S'MATCH-IT Range - PROFLEX M


Top of the range
Double joist system.
60 % Shock absorption

Advantages : Performance, important
Basket past history, ...
Disadvantages : Cost and of installation
time ...

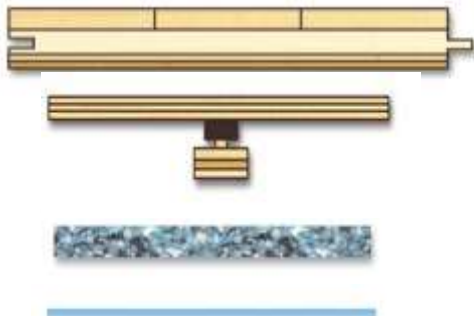

- 22mm Multilayer (Beech / Oak) – Width 188mm – Stapled on joist
- Double joist system. Birch plywood 22mm joist - c/c 280mm. Sub-construction delivered on 4 parts modules (2,5 m²)
- 10mm elastomeric pads on each joist intersection
- TARFOAM 1200 - 12mm 100% recycled PU foam - 2m rolls– 51,75m²
- TARFILM – Polyethylene film anti-steam– 3m rolls– 159m²
- Accessories : Trap doors, ventilated skirtings compulsory, ...


S'MATCH-IT Range - PROFLEX Installation

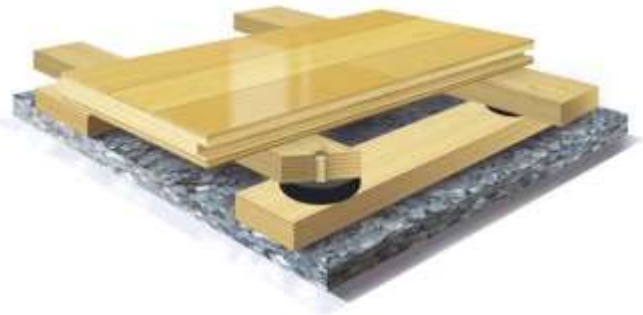

PROFLEX M
22mm multilayer beech or oak
Double joist system + Pad
12mm foam
60 % Shock absorption




S'MATCH-IT Range - PROFLEX Installation

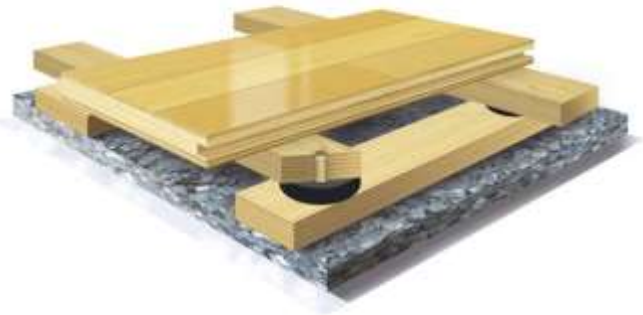

PROFLEX M
22mm multilayer beech or oak
Double joist system + Pad
12mm foam
60 % Shock absorption



S'MATCH-IT Range - PROFLEX Installation

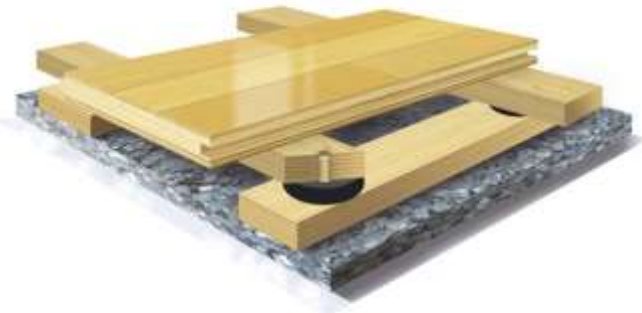


PROFLEX M

22mm multilayer beech or oak
Double joist system + Pad
12mm foam
60 % Shock absorption



S'MATCH-IT Range - PROFLEX Installation

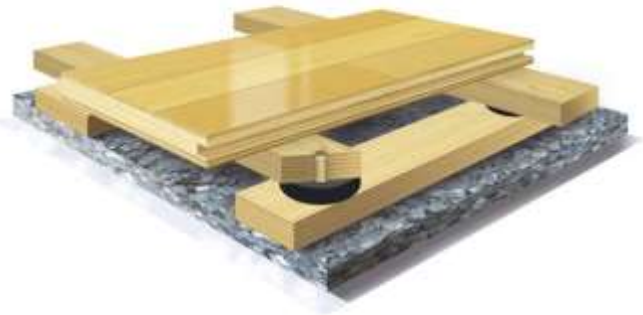

PROFLEX M
22mm multilayer beech or oak
Double joist system + Pad
12mm foam
60 % Shock absorption



S'MATCH-IT Range - MULTIFLEX M

Versatility

Continuous sub construction


52 % Shock absorption

Výhody : Cena / Vlastnosti,
univerzálnosť, rýchla a jednoduchá
inštalácia, ...

Nevýhody : príliš tuhé pre Basketball



- 14mm Ultraloc multilayer (Beech / Oak / Maple) - width 188mm
- TARGLUE – PU glue used as link between sub-construction and facing
- TARFLEX – 9mm birch plywood sub-construction, under-side grooving for flexibility and upper-side for gluing - 45° floating installation, 5 to 10mm between boards
- TARFOAM 1500 - 15mm 100% recycled PU foam - 2m rolls – 51,75m²
- TARFILM – Polyethylene film anti-steam – 3m rolls – 159m²
- Accessories : Trap doors, ventilated skirtings compulsory, ...

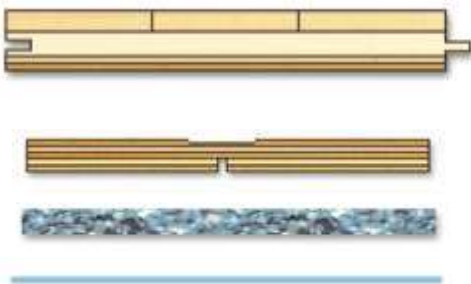

S'MATCH-IT Range - MULTIFLEX Installation



MULTIFLEX M

Multilayer 14mm

Continuous plywood 9mm / 45° direction

15mm foam

52 % Shock absorption



S'MATCH-IT Range - MULTIFLEX Installation



MULTIFLEX M

Multilayer 14mm
Continuous plywood 9mm / 45° direction
15mm foam
52 % Shock absorption



S'MATCH-IT Range - MULTIFLEX Installation



MULTIFLEX M
Multilayer 14mm
Continuous plywood 9mm / 45° direction
15mm foam



S'MATCH-IT Range - MULTIFLEX Installation



MULTIFLEX M

Multilayer 14mm

Continuous plywood 9mm / 45° direction

15mm foam

52 % Shock absorption



S'MATCH-IT Range - SPORTABLE - References



LNH (National Handball League) Sportable – D1 – 1100 m²

S'MATCH-IT Range - SPORTABLE - References



Palais des sports de Nanterre (France) – Pro B – 700m²



S'MATCH-IT Range - SPORTABLE - References

Miami – American Airlines Arena



Zrenjanin - Serbia

S'MATCH-IT Range - SPORTABLE

SPORTABLE

Multilayer instead of solid
Continuous sub-construction

>>> Weight, Performance et Durability
Tests EN 14904 / EN 13501-1 completed
Shock absorption 60 %

- Panel size: 2,47 m x 0,61 m
- Weight panel : 28 kg
- Thickness : 44 mm






S'MATCH-IT Range - SPORTABLE



S'MATCH-IT Range - SPORTABLE



S'MATCH-IT Range - SPORTABLE

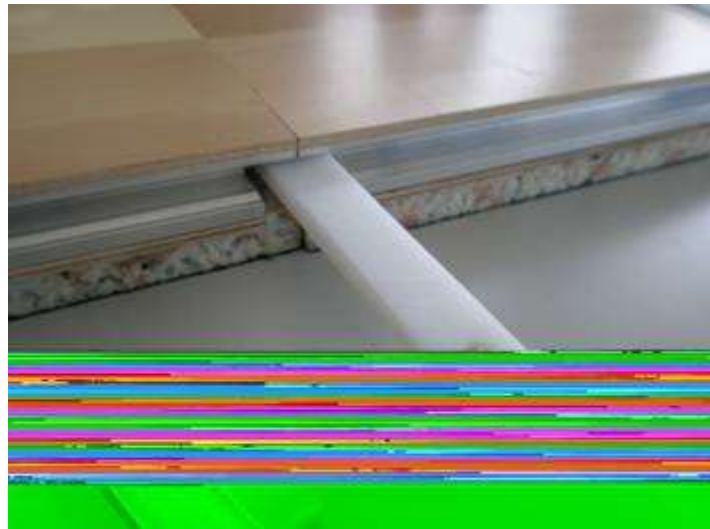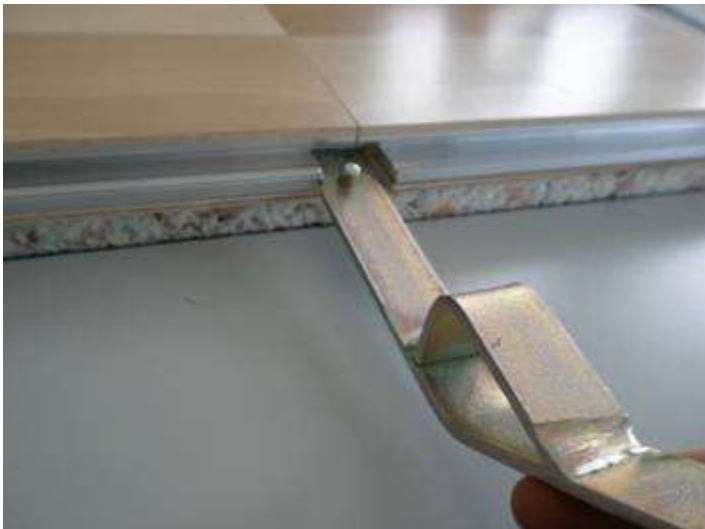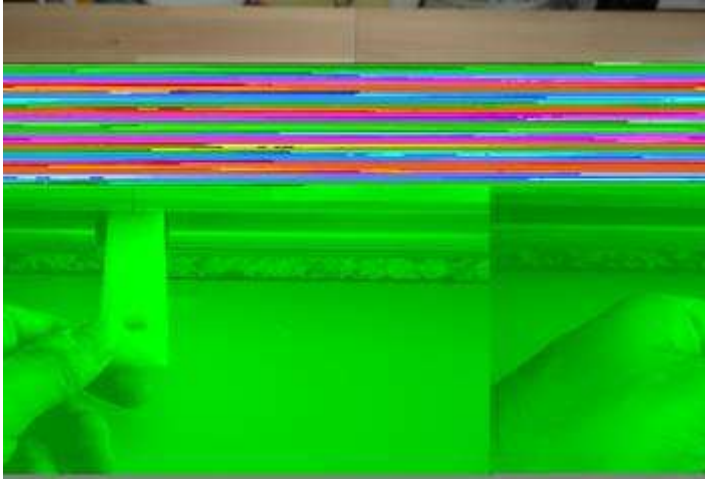

S'MATCH-IT Range - SPORTABLE

- New Sportable






Lumaflex

Most technical products:
Performances et comfort for
users

Objective: Sub-construction
which combines a resilient sub-
layer (comfort et safety) and a
perfectly rigid and flat surface
(Lino or PVC installation
without telegraph through)



LUMAFLEX Range – Konštrukcia

Vďaka svojej pružnosti a komfortu, Lumaflex Duo je zameraná pre deti a žiakov, ktorí vyžadujú vyššie pohodlie

The Lumaflex Classic sa odporúča pre vyššiu úroveň športového využitia a väčšiu športovú záťaž



Lumaflex Duo

- LUMAFLEX DUO – Patentovaná dvojité perodrážka 18mm preglejka z brezy. Dosky : 2430 x 295mm
- TARFOAM 1500 - 15mm 100% recycled PU foam - 2m role – 51,75m²
- TARFILM – Parozábrana – polyetilén – 3m rolls – 159m²

Lumaflex Classic

- LUMAFLEX CLASSIC – Patentovaná dvojité perodrážka 20.5mm Preglejka z brezy. Dosky : 2430 x 188mm
- TARFOAM 1500 - 15mm 100% recycled PU foam - 2m role – 51,75m²
- TARFILM – Parozábrana polyetilén – 3m role – 159m²

LUMAFLEX Range – Products

Konštrukcia

LUMAFLEX DUO
 Thickness : 18mm
 Boards width 295mm

LUMAFLEX CLASSIC
 Thickness : 20,5mm
 Boards width 138mm

Povrch


LINOSPORT CLASSIC
 4mm –Linofinish applied on site

LINOSPORT XF
 3,2mm - XF finishing (factory applied)

OMNISPORTS Speed
 3,45mm


OMNISPORTS Training 5,0mm

OMNISPORTS REFERENCE
 6,5mm

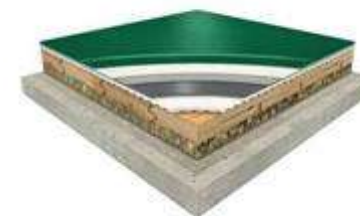



Linosport



LINOSPORT

Tarkett Sport Indoor 2009

Vyžaduje sa inštalácia na odpruženú konštrukciu!

LINO

LINOSPORT CLASSIC
4mm – With finishing applied on site

LINOSPORT XF
3,2mm – Factory applied finishing

10 colours



LINOSPORT

□ Linoleum

- 2m width / cca 28m dĺžka (max)
- Zvarovacie šnúry

□ Výhody Linosport XF

- Priaznivé k životnému prostrediu
 - Prírodný produkt
 - Vysoká odolnosť
 - Nízke emisie počas produkcie
 - ISO 14001 certifikovaná výroba
- Ekonomické
 - Povrhová úprava nanášaná vo výrobe – šetrí čas inštalácie (cca 2 dni)
 - Jednoduchá údržba
- Bezpečné pre pokladačov i užívateľov
 - Bez toxických výparov
 - Nízke VOC emisie



LINOSPORT preprava a manipulácia



LINOSPORT je skladovaný v Narni a umiestnený na paletách (dokonca i jedna rola).



LINOSPORT preprava a manipulácia



Prvý krok

- na rozrolovanie materiálu použite špeciálne náradie aby ste sa vyhli poškodeniu materiálu.




LINOSPORT transportation and handling



Druhý krok

- Pokladajte po sebe idúce role v rovnakom smere
- Rozrolujte iba toľko materiálu, koľko nainštalujete v daný deň

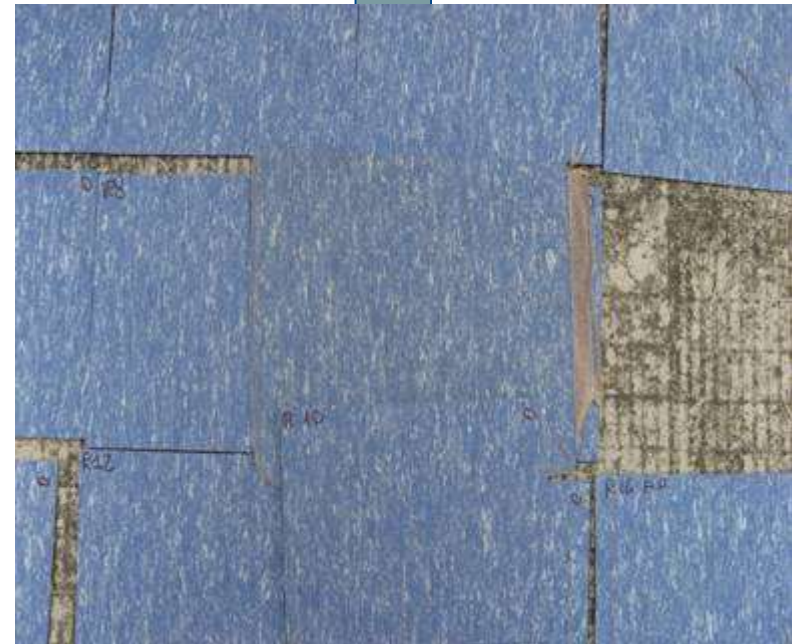

LINOSPORT

